

Status LEDs


PW ERR TTL L2C
OOOO SYS
OK LINK GAT ADDR
OOOO WR
Conv-TTL-Blo
8 4 2 1
OOOO
MULTICAST ADDR

SFP connector
White Rabbit



INPUTS

TTL triggers for
Blocking repetition

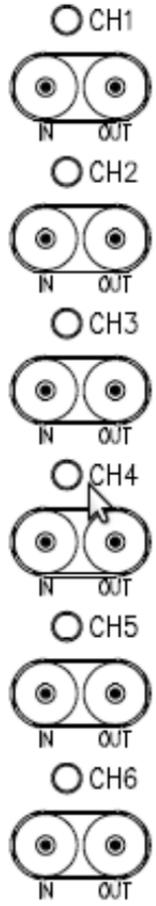


OUTPUTS

TTL-level replica
of Blocking pulses

INPUTS

General
purpose

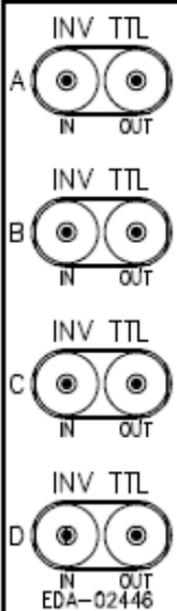

**INVERTED
OUTPUTS**

General
purpose